


L±2"(L±50)

ST/PC MM CONNECTOR

TEXT PRINTING :
ACT Premium Multi mode Fiber Optic Patch cable 50/125 um, OM2, PVC, E222963 (UL) c(UL)

LC/PC MM CONNECTOR

HOUSING COLOR: BEIGE

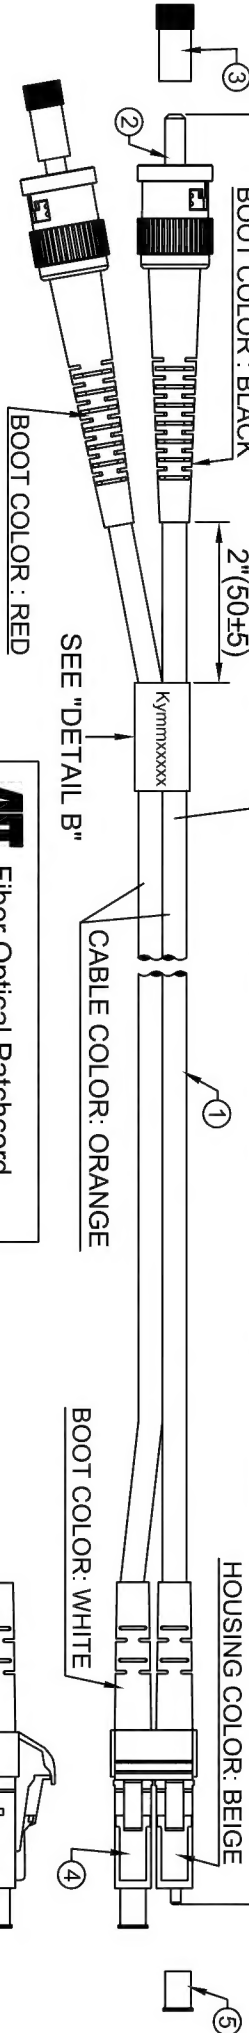

SEE TABLE "DESCRIPTION 1"

- NOTE:
1. INSERTION LOSS < 0.3dB.
 2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
 3. DURABILITY: 500 CYCLES.
 4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
 5. TENSILE STRENGTH: 10Kg.
 6. PACKING:

AE Fiber Optical Patchcord

ST/PC to LC/PC Duplex Multimode 50/125, OM2, Ø3.0mm xXL-RoHS

Model: xxxxx -xxxxxx

Lot number

PO/NO

Performance: (@23°C) λ=850/1310±20nm

Serial No	Insertion Loss ≤ 0.3dB
850nm	1310nm
A	
B	
C	
D	


Kymmmxxxx

X X X X X X X X X X X X


Prepared By: _____ Date: _____

DETAIL C

BAG TYPE	QTY	LABEL
SMALL	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES
LARGE	POLYBAG	ALL
EACH LARGE POLYBAG IN AN OUTER CARTON		

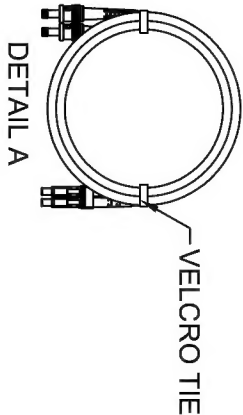

DETAIL A



DETAIL B

y: Year, mm: Month
xxxxx: Serial Number

5	2PCS	LC DUST COVER, WHITE.
4	2SETS	CONNECTOR, LC/PC MM BEIGE HOUSING WITH WHITE BOOT.
3	2PCS	ST DUST COVER, CLEAR.
2	2SETS	CONNECTOR, ST/PC MM, WITH BLACK & RED BOOT.
1	1PC	CABLE: MULTIMODE, 50/125um, 3.0mm ZIPCORD, OFNR, ORANGE JACKET.
ITEM	QTY	PART NO.
DESCRIPTION		
PART LIST		

REV.	REVISION	DATE
------	----------	------

RL7510	10	10	32.8'(10000)	913210-RL7510	8716065224337
RL7505	05	5	16.4'(5000)	913205-RL7505	8716065224320
RL7503	03	3	9.84'(3000)	913203-RL7503	8716065224313
RL7502	02	2	6.56'(2000)	913202-RL7502	8716065224306
RL7551	51	1.5	4.92'(1500)	9132015-RL7551	8716065224290
RL7501	01	1	3.28'(1000)	913201-RL7501	8716065224283
PART NO.	**	XX	L	DESCRIPTION 1	DESCRIPTION 2
CUSTOMER APPROVAL:				DATE:	



	UNIT: Inches[mm]	TITLE: PATCHCORD ST-LC MULTIMODE DUPLEX 50/125, OM2, 3.0mm, ORANGE.
DRAWN BY Catherine	DATE 2007/10/4	CUSTOMER CUSTOMER PART NO. RL75**
CHECKED BY	DATE	DRAWING NO. PK709018 Ref. NO. REV. A
APPROVED BY	DATE	TRENDX PART NO.
SALE BY	DATE	